
MA OBD Classic QUICK START GUIDE

STEP 1

Locate the OBD port on your vehicle


The OBD port can be located underneath the dashboard on the driver's side. All vehicles made since 1996 have this port. The OBD socket looks like the image below.

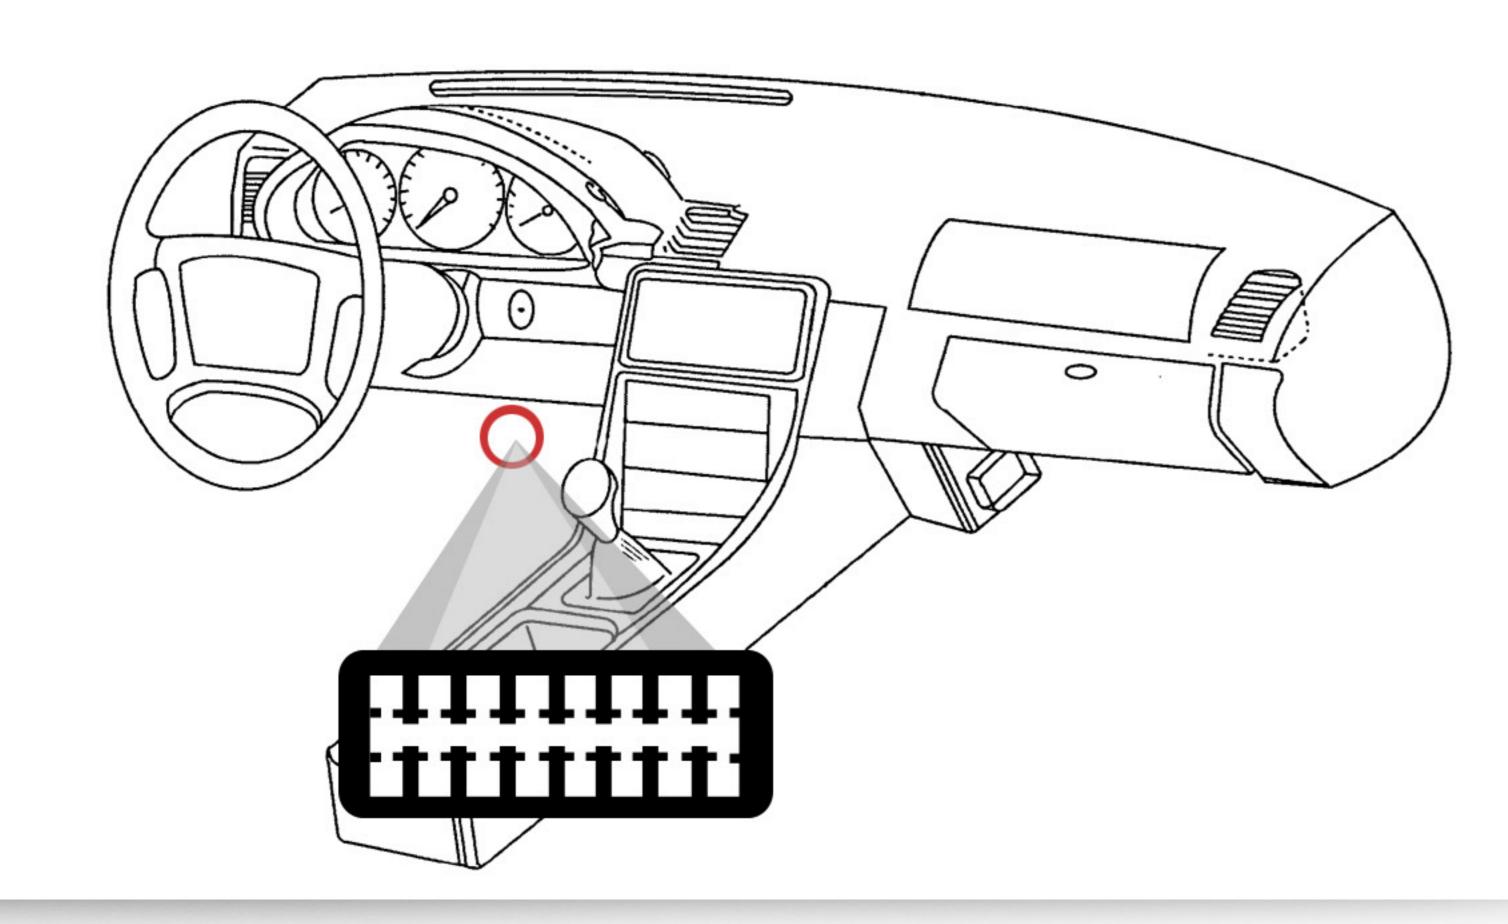

STEP 2

Connect the GPS Tracker to your vehicle's OBD port

There are status indicators on the device (opposite the OBD socket).

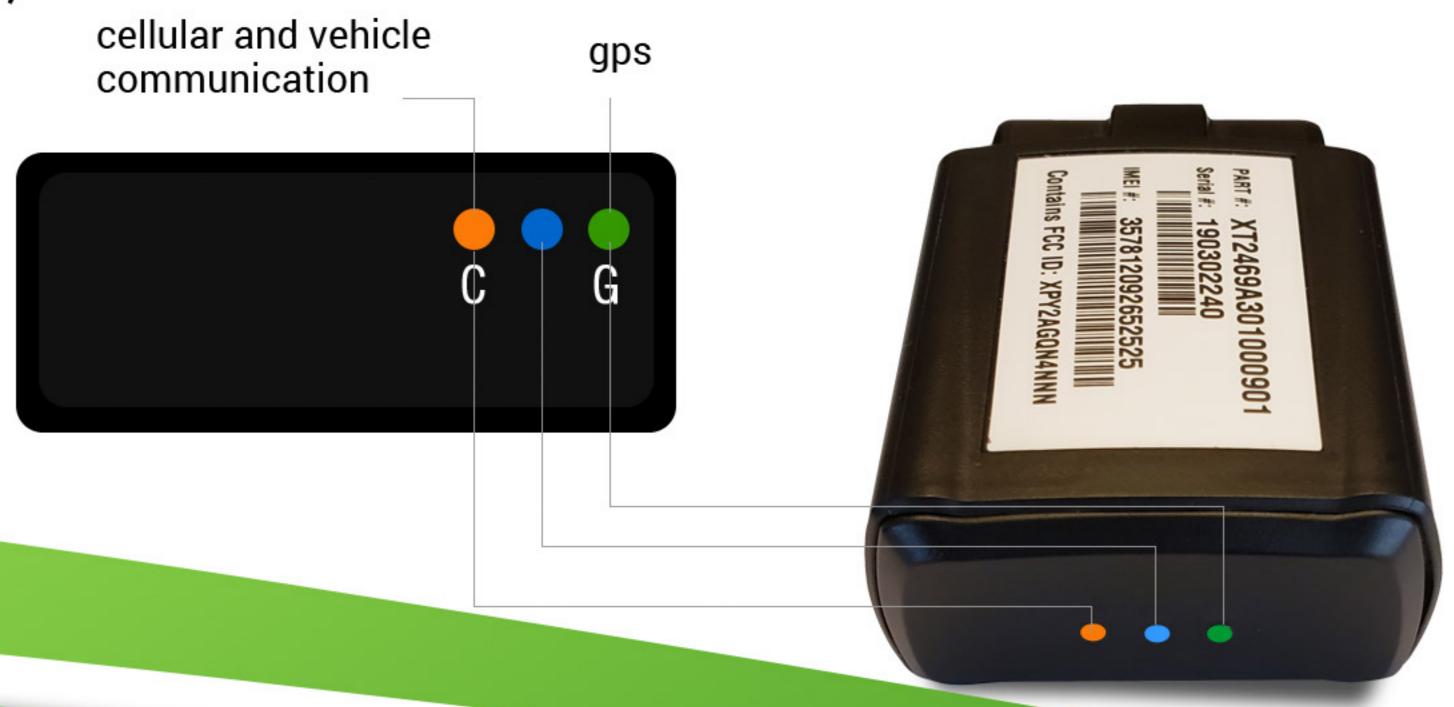

LED	DESCRIPTION	STATUS
Amber (Cellular and Vehicle Communication)	Cellular Off	LED Off
	Searching for GSM Network	Fast Blinking
	GSM Lock (connected to cellular network)	Slow Blinking (once every 2 seconds)
	GSM Lock/Ignition On	Solid Light (No Blinking)
Green (GPS/Satellite)	Searching for Satellite	LED Off
	GPS Lock (connected to satellite)	ON for 2 Secs
Note: Blue light can be ignored		

STEP 3 Device Activation

- Your login details will be emailed to you. Log on to your account using the account username and password.
- Login to your platform and start tracking.

STEP 4 Default HQ Location

Device may show at the default location. If it does, once the amber LED is slow blinking once every 2 seconds, take the device for a 10 minute drive. It will start transmitting and update the current location. If your device does not update, click the SUPPORT TEAM button on your platform to get 24/7 online technical support.

